

MIXING

- Bottom and helix made of wear resistant STEEL 450HBW
- Rounded fixed safety grill complete with bag breaker
- Electric valve, hydraulic hoses + electric connection kit
- Coupling to the machine



MIXER BUCKET WITH CENTRAL DISCHARGE



- Welded helix made of wear steel 450HBW
- Unloading pipe 1500mm length
- Sintered steel seal group

Suitable for any type of earth moving machine:	
Skid loader	150/200/250/350/450
Backhoe loaders-Compact wheel loaders	BM450/600/700
Wheel loaders	BM1100/1500/2000
Telehandlers	2/2,5 t BM350/450 3/4 t BM600 >4,5 t BM700
Excavators	starting from 3,5 t

MIXER BUCKET WITH SIDE DISCHARGE



- Bolted helix made of wear steel 450HBW
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm)
- Bolted bracket as standard supply, starting from class 3 models
- Polyurethane seal group


Suitable for any type of earth moving machine:	
Skid loader	BM100/150/200/250/330/400SL
Backhoe loaders-Compact wheel loaders	BM400/500/600SL
Wheel loaders	BM700/1100SL
Telehandlers	2/2,5 t BM250/330/400SL 3/4 t BM500/600SL >4,5 t BM700SL
Excavators	starting from 3,5 t

TWIN DOOR MIXER BUCKET



- Bolted helix made of wear steel 450HBW
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm) and side chute
- Bolted bracket as standard supply, starting from class 3 models
- Polyurethane seal group

Suitable for any type of earth moving machine:	
Skid loader	BM150/200/250/330/400TD
Backhoe loaders-Compact wheel loaders	BM400/500/600TD
Wheel loaders	BM700/1100TD
Telehandlers	2/2,5 t BM250/330/400TD 3/4 t BM500/600TD >4,5 t BM700TD
Excavators	starting from 3,5 t

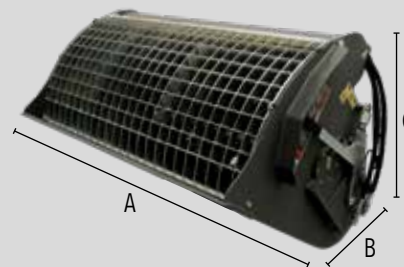

DIMENSIONS

		BM 150 TD	BM 200 TD	BM 250 TD	BM 330 TD	BM 400 TD	BM 500 TD	BM 600 TD	BM 700 TD	BM 1100 TD
A	Width	1350	1560	1560	1670	1780	1865	2010	2160	2280
B	Depth	660	660	860	860	860	1075	1075	1075	1305
C	Height	645	645	800	800	800	1033	1033	1033	1250

The concrete mixer bucket M3 model TD is equipped with: safety grill with bag splitter - BOTTOM and bolted HELIX made of wear resistant steel 450 HBW - hydraulic motor fully protected - chain tensioner - electric valve with hydraulic hoses - electric connection kit - hydraulic hoses - flat face couplings (only for SSL) - hydraulic opening of the bottom through a cylinder with covered rod - manually-operated side discharge - unloading pipe L=1500 mm - side chute extension - coupling to the machine (standard bolted bracket starting from mod. BM500TD).

By matching the mixing bucket to compact loaders, please consider the following: the operating load of the machine \geq the full load weight of the mixer bucket.

OPTIONALS

	Protection grid with manual opening, gas springs and safety sensor.	Bolted bracket
Electric spring winder	Excavator bracket - direct coupling	





MODEL	BM 150 TD	BM 200 TD	BM 250 TD	BM 330 TD	BM 400 TD	BM 500 TD	BM 600 TD	BM 700 TD	BM 1100 TD
Class	1	1	2	2	2	3	3	3	4
Capacity [L]	150	200	250	330	400	500	600	700	1100
Transmission	chain	chain	chain	chain	chain	chain	chain	chain	chain
Empty weight [kg]	310	335	435	455	480	720	740	790	1060
Full load weight [kg]	670	815	1035	1247	1440	1920	2180	2470	3700
Min/max flow rate [L/min]	30/60	30/60	40/75	35/75	35/75	70/150	70/150	70/150	100/115
Max pression cont/peak [bar]	175/225	175/225	175/225	210/300	210/300	150/310	150/310	150/310	205/330

