

GROUND SWEEPING

- Collecting bucket
- Polypropylene brush
- Coupling to the machine
- Extremely tough and rugged



SWEeper BUCKET HD



- Direct drive motor
- Brushes made of PPN Ø550 mm
- Double-bevelled blade & reinforcements made of steel HBW450
- It is operated forward & backwards

SWEeper BUCKET F



- PPN brush Ø550 mm
- No. 3 support wheels Ø250x70mm
- Collection bucket with hydraulic opening and closing.
- It is operated only forward
- Floating system for forklift or forks



SWEeper BUCKET D



Ø590 mm polypropylene brush

N. 2 Ø250x50mm support wheels

Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for skid loader, backhoe loader, wheel loader, and forklift up to 7 T; and tractors

SWEeper BUCKET DS



Ø660 mm polypropylene brush

N. 3 Ø250x60mm support wheels

Built-in motor

Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for wheel loader, backhoe loader and telehandlers from 5 to 12 T, tractors from 100 HP and forklifts from 3,5 T

SWEeper BUCKET C



Ø750 mm polypropylene brush

N. 3 Ø405x110mm support wheels

Built-in motor

Mechanical working angle adjustment


Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for wheel loaders and telehandlers starting from 12 T and tractors from 100 HP



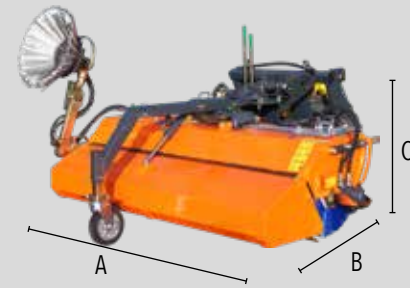

DIMENSIONS

		BS 135 D	BS 150 D	BS 180 D	BS 200 D	BS 230 D	BS 260 D
A	Width	1680	1830	2130	2330	2630	2930
B	Depth	1650	1650	1650	1650	1650	1650
C	Height	1200	1200	1200	1200	1200	1200

The sweeper bucket M3 series D is designed for customers who work both in the field of cable or phone laying sectors and of road maintenance.

It can be fitted to any kind of skid loader, backhoe loader, wheel loader, and forklift up to 7 T; and tractors. It is equipped with hydraulically driven collecting bucket - polypropylene brush Ø 590 mm., no. 2 support wheels 250x50 mm, hydraulic hoses, floating system and mechanical adjustment of the work angle.

OPTIONALS

	Overflow valve	3rd front wheel Ø 250x50 mm
Ø600 mm PPN side brush right/left	Internal hydraulic motor	Hydraulic working angling adjustment (an additional hydraulic line is required)
100 L water tank with electric pump and nebulizers	200 L water tank with electric pump and nebulizers (not available in mod. BS135D)	Solenoid valve kit to operate the hydraulic adjustment (if the machine is not equipped with 2 hydraulic lines)





MODEL	BS 135 D	BS 150 D	BS 180 D	BS 200 D	BS 230 D	BS 260 D
Working width [mm]	1350	1500	1800	2000	2300	2600
Working width with 20° angle [mm]	1270	1410	1690	1880	2160	2440
Required oil flow (at 160bar) [L/min]	30	30	30	40	40	50
Ø Brush [mm]	590	590	590	590	590	590
Weight with collecting bucket [kg]	329	344	373	398	429	462
Capacity of collecting bucket [L]	166	184	220	244	280	315
Number of rings [n°]	25	28	34	38	44	50

