

# GROUND SWEEPING

- Collecting bucket
- Polypropylene brush
- Coupling to the machine
- Extremely tough and rugged



## SWEeper BUCKET HD



Direct drive motor

Brushes made of PPN Ø550 mm

Double-bevelled blade & reinforcements made of steel HBW450

It is operated forward & backwards

## SWEeper BUCKET F



PPN brush Ø550 mm

No. 3 support wheels Ø250x70mm

Collection bucket with hydraulic opening and closing.

It is operated only forward

Floating system for forklift or forks

## SWEeper BUCKET D



Ø590 mm polypropylene brush

N. 2 Ø250x50mm support wheels

Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for skid loader, backhoe loader, wheel loader, and forklift up to 7 T; and tractors

## SWEeper BUCKET DS



Ø660 mm polypropylene brush

N. 3 Ø250x60mm support wheels

Built-in motor

Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for wheel loader, backhoe loader and telehandlers from 5 to 12 T, tractors from 100 HP and forklifts from 3,5T

## SWEeper BUCKET C



Ø750 mm polypropylene brush

N. 3 Ø405x110mm support wheels

Built-in motor


Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for wheel loaders and telehandlers starting from 12 T and tractors from 100 HP

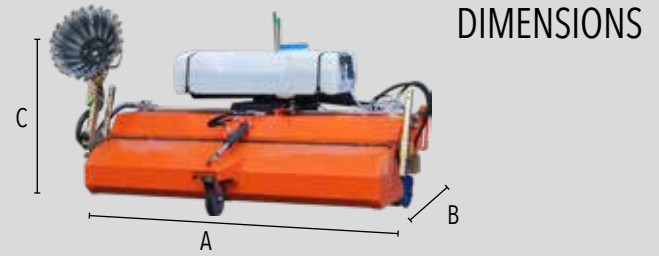

## DIMENSIONS

		BS 200 DS	BS 230 DS	BS 260 DS	BS 280 DS
A	<b>Width</b>	2230	2530	2830	2990
B	<b>Depth</b>	1850	1850	1850	1850
C	<b>Height</b>	1200	1200	1200	1200

The sweeper bucket M3 series DS is designed for customers who work both in the field of cable or phone laying sectors and in the road maintenance, or for the clean-up of big external areas.

It can be fitted to any kind of wheel loader, backhoe loader and telehandlers from 5 to 12 T, tractors from 100 HP and forklifts from 3,5 T. It is equipped with hydraulic collecting bucket - PPN brush Ø 660 mm., no. 3 support wheels 250x60 mm, hydraulic hoses, integrated motor, floating system and mechanical adjustment of the work angle.

## OPTIONALS

	Overflow valve	Side brush right or left Ø 600 mm in PPN and STEEL
Solenoid valve kit to operate the hydraulic adjustment (if the machine is not equipped with 2 hydraulic lines)	Water tank 200 l with electric pump and nebulizers	Hydraulic working angling adjustment (an additional hydraulic line is required)
Nebulizer kit (without tank)		





MODEL	BS 200 DS	BS 230 DS	BS 260 DS	BS 280 DS
Working width [mm]	2000	2300	2600	2800
Working width with 20° angle [mm]	1880	2160	2440	2600
Required oil flow (at 160bar) [L/min]	40	40	50	50
Ø Brush [mm]	660	660	660	660
Weight with collecting bucket [kg]	575	610	644	661
Capacity of collecting bucket [L]	315	361	407	431
Number of rings [n°]	38	44	50	53

