

GROUND MOVING

- Extremely tough and rugged
- 30° angle
- Heavy cylinders
- Bolt-on reversible blade made of steel HBW450
- Coupling for skid loader




DOZER BLADE




Hydraulic hoses with quick couplings

Shockproof valve



TILT DOZER BLADE

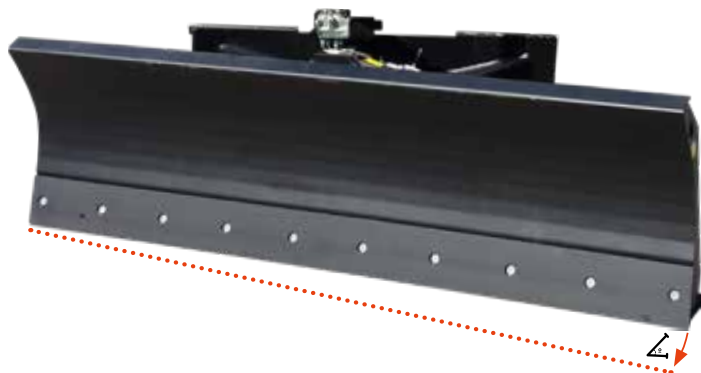

Hydraulic hoses with quick couplings

Shockproof valve

1/2" electrovalve

Hydraulic oscillation +/- 8°

Standard electric kit

LEVELING BOX DOZER BLADE




Proportional distributor

Rear pad with hydraulic control which neutralizes the riding effect

Laser control system

Bolt-in blade

Standard electric kit

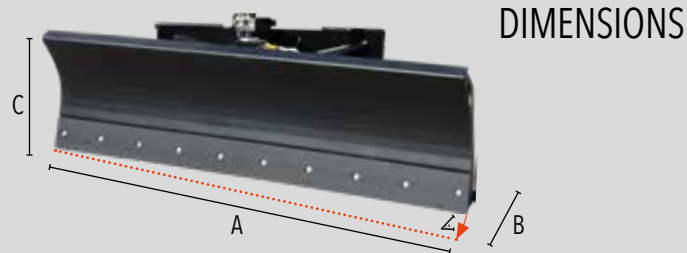

		TDB 180	TDB 210	TDB 240	TDB 270
A	Width	1810	2110	2410	2710
B	Depth	600	600	600	600
C	Height	730	730	730	730

- It is equipped with shockproof valve
- Bolt-on blade made of steel 450HBW
- Electric valve complete with hydraulic hoses

The M3 dozer blade can be easily fitted to any kind of skid steer loader, wheel loader and telehandlers up to 80HP.

It is equipped with shockproof valve, hydraulic angle $\pm 30^\circ$, hydraulic hoses, ± 8 hydraulic oscillation, bolted bracket in wear-resistant steel 450 HBW and coupling to SSL.





MODEL	TDB 180	TDB 210	TDB 240	TDB 270
Working width [mm]	1560	1820	2075	2330
Weight [kg]	360	390	430	490
Max pressure [bar]	250	250	250	250
Oil flow [L/min]	100	100	100	100
Hydraulic blade inclination R/L	±30°	±30°	±30°	±30°
Hydraulic blade oscillation R/L	±8°	±8°	±8°	±8°

